


All-welded heavy-duty construction Speed up to 40 TPM

Powered discharge conveyor (9" elevation)

Positive vacuum pull-down & blank transfer

Easy-load hopper at 40" elevation with 18"-high blank capacity

Rack-and-pinion style quick adjustment Sliding, electrically-interlocked Lexan® safety guard doors



Fax: 305.245.8057



TRAY FORMER

MODEL TE-700-VF-CORNER POST

NOTE: For sizes above or below standard range consult manufacturer.



Electrical 220 V / 3 phase / 60 hz

Control 24 V DC Electrical Code NEMA 12

Air Line Input 80 psi 1/2" NPT inlet
Air Usage 15 SCFM @ 40 TPM
Floor Space 50" L x 154" W

Speed up to 40 TPM





Incline Discharge Conveyor Feed-on-demand Circuitry

Fax: 305.245.8057

Casters

Special Electrics

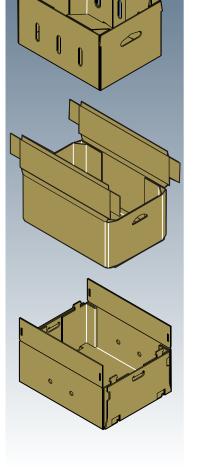

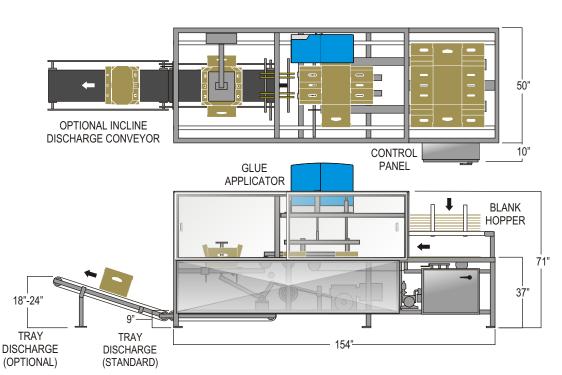

Features, Specifications, and Options subject to change without notice